


STEEL

FRE - SS - 002

Outdoor Shower


TECHNICAL SPECIFICATIONS

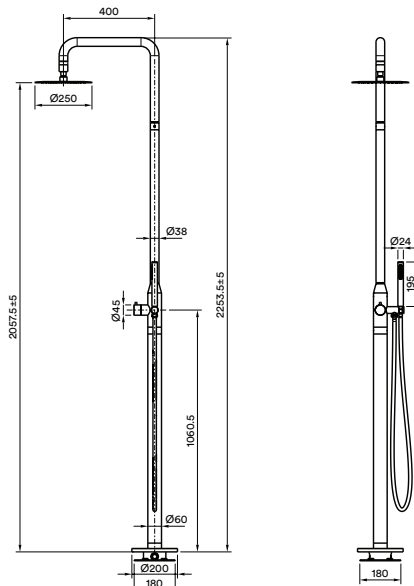

PRODUCT



DETAILED ASSEMBLY

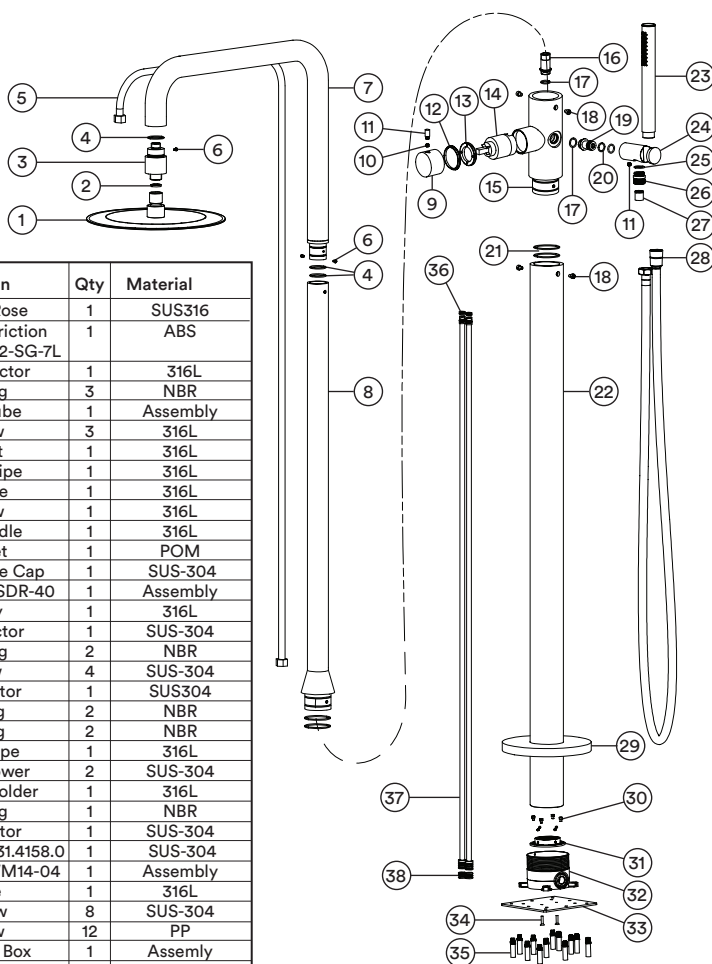

No	Description	Qty	Material
1	Shower Rose	1	SUS316
2	Flow Restriction Sheet GVC1/2-SG-7L	1	ABS
3	Connector	1	316L
4	O-Ring	3	NBR
5	Braid Tube	1	Assembly
6	Screw	3	316L
7	Spout	1	316L
8	Union Pipe	1	316L
9	Handle	1	316L
10	Screw	1	316L
11	Pin Handle	1	316L
12	Gasket	1	POM
13	Cartridge Cap	1	SUS-304
14	Cartridge BSDR-40	1	Assembly
15	Body	1	316L
16	Connector	1	SUS-304
17	O-Ring	2	NBR
18	Screw	4	SUS-304
19	Connector	1	SUS304
20	O-Ring	2	NBR
21	O-Ring	2	NBR
22	Union Pipe	1	316L
23	Hand Shower	2	SUS-304
24	Shower Holder	1	316L
25	O-Ring	1	NBR
26	Connector	1	SUS-304
27	Check Valve 31.4158.0	1	SUS-304
28	PVC Hose WM14-04	1	Assembly
29	Base	1	316L
30	Screw	8	SUS-304
31	Screw	12	PP
32	Embedded Box	1	Assembly
33	Fixed Bottom Plate	1	SUS304
34	Screw	2	SUS-304
35	Screw	12	PP
36	O-Ring	4	NBR
37	Extension Tube	2	SUS-304
38	O-Ring	6	NBR

FEATURES

- 15 Year Warranty
- 316 Stainless Steel
- European Cartridge
- Flow rate : 8 Litres per minute @ 3 bar pressure.



WARRANTY

Refer to joansa.co.za for warranty terms & conditions.

CARE

Preparation:

Apply copper slip lubricant to prevent seizing of threaded fasteners.

Cleaning:

- Remove dirt using clean water and a soft cotton cloth.
- Clean the stainless steel surface with:
 - Gentle liquid detergent.
 - Colourless glass cleaner.
 - Non-abrasive polishes.
- Dry and remove all cleaning material with a soft cotton cloth.

CERTIFICATION

JASWICK APPROVED.
SABS TESTED & APPROVED.



Stainless Steel
with a conscience

+27 (021) 510 0489
30 Royal Road, Maitland,
Cape Town. 7405. South Africa

FLOW RATE

